




BOTTOM VIEW

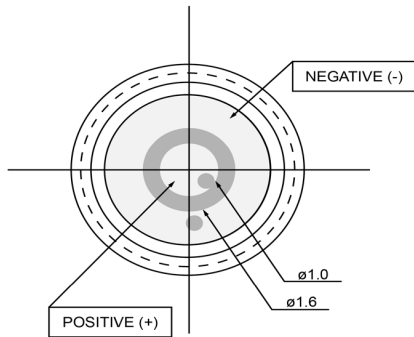


SIDE VIEW



ANGLED VIEW

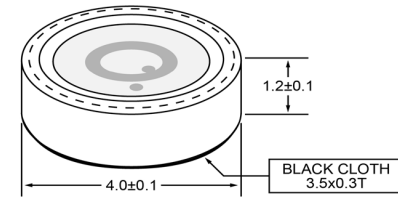

Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Directivity	Omnidirectional		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S			
Technology	Electret Condenser										
Sensitivity	-44	(dB)									
Frequency Range	40 ~ 20,000	(Hz)									
Rated Voltage	2	(V)									
Output Impedance	2,200	(Ohm)									
Connection Method	Solderless										
Voltage Range	1 ~ 10	(V)									
Max Rated Current	0.45	(mA)									
Minimum Signal to Noise Ratio	>60	(dB)									
Operating Temperature	-40 ~ +85	°C									
Storage Temperature	-40 ~ +85	°C									
 DB UNLIMITED				Electret Condenser Microphone			MO044402-7				

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.