



Part Number:	TE122412-6	
DESCRIPTION:	Electro-Mechanical Transducer	
DRAWN	CJ	10/28/2024
CHECKED	P.D	11/6/2024
APPROVED	J.S	11/6/2024

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

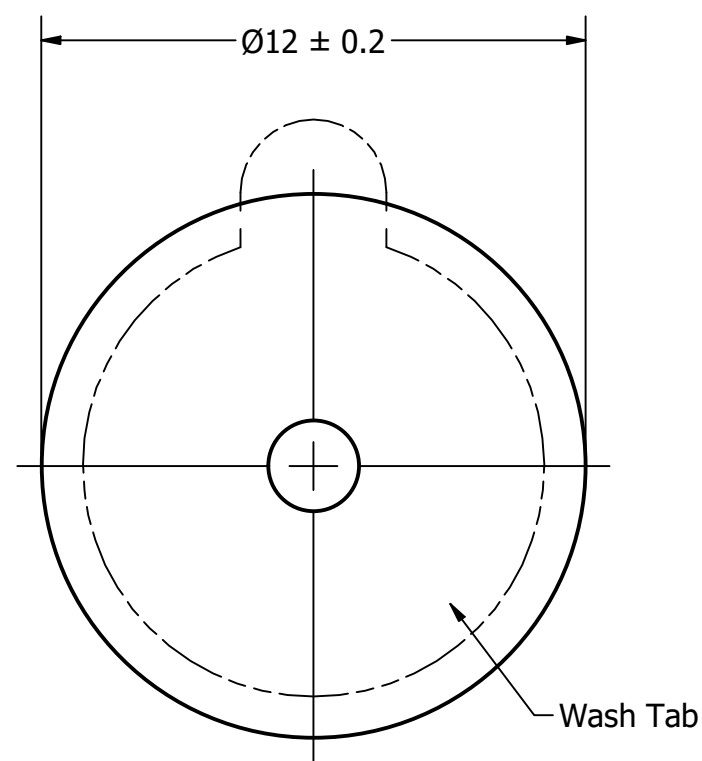

Side View

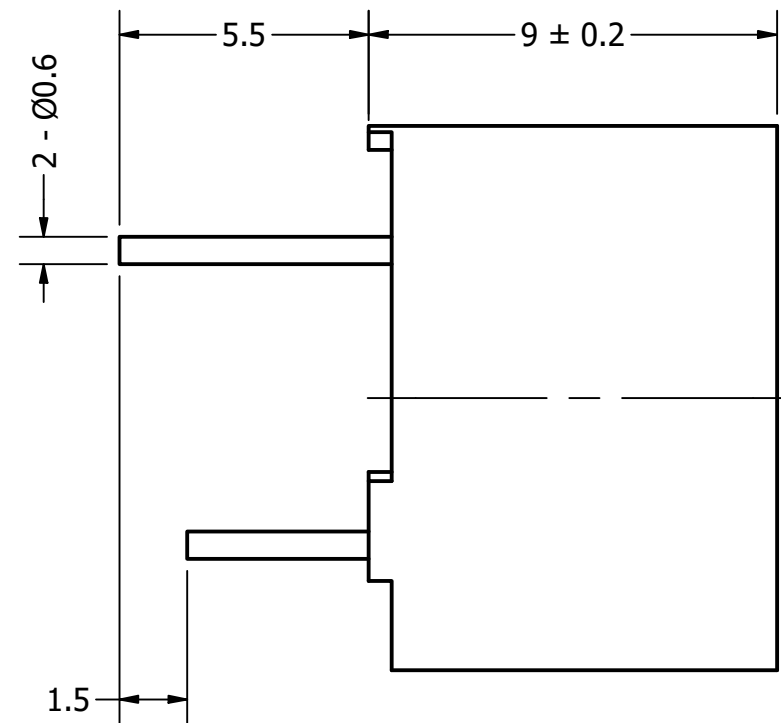

Bottom View

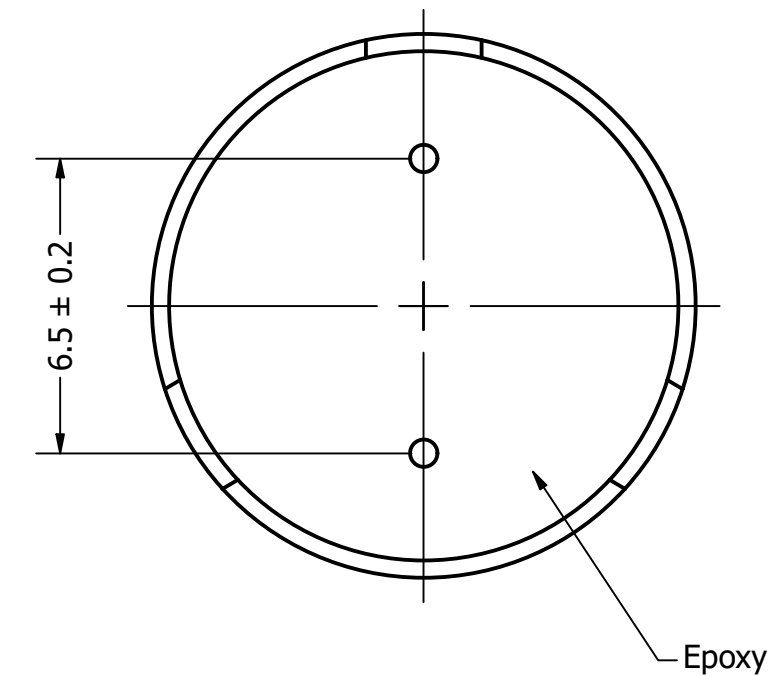

Ω

Items	Specifications	Conditions	REVISION HISTORY			
Sound Pressure Level	85	dB (@ 10cm)	REV	DESCRIPTION	DATE	APPROVED
Resonant Frequency	2,400	Hz	1	Released from Engineering	10/21/2013	J.S.
Rated Voltage	12	V		Updated to new template	11/6/2024	P.D.
Voltage Range	6 ~ 15	V	NOTES			
Coil Resistance	140	Ω	1) All dimensions are in mm unless otherwise noted			
Max. Rated Current	40	mA	2) All tolerances are ± 0.5 mm unless otherwise noted			
Storage Temperature	-40 ~ +85	°C	3) All parts meet RoHS			
Operating Temperature	-30 ~ +75	°C	4) Subject to change or redrawn without notice			
Connection Method	PC Pin					
Mount Type	Thru-Hole Mount					
Housing Material	NORYL					
Weight	2	g				