




SIDE VIEW

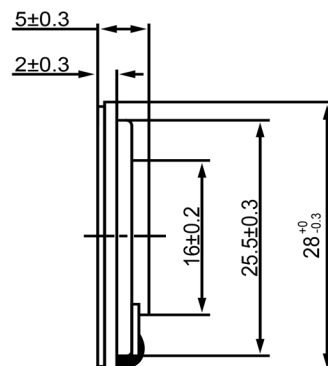

BOTTOM VIEW

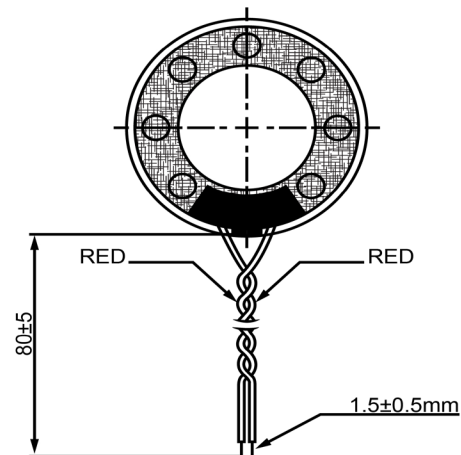

Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description			Date	Approved		
Shape	Round		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering			10/21/2013	J.S		
Resonant Frequency	450	(Hz)									
Frequency Range	450 ~ 4,500	(Hz)									
SPL @ 10cm	90	(dBA)									
Impedance	4	(Ohm)									
Cone Material	Mylar										
Nominal Power	0.2	(W)									
Max Power	0.4	(W)									
Mount Type	Flush										
Operating Temperature	-40 ~ +66	°C									
Storage Temperature	-40 ~ +66	°C									
Weight	7.5	(g)									
				Drawn by			Date	Checked by	Date	Approved by	Date
				A.B.			10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
			Dynamic Speaker			SM280404-1					