



Part Number:	SM300408-2	DRAWN CJ	8/10/2016
		CHECKED P.D.	8/10/2016
	Description: Dynamic Speaker	APPROVED J.S.	8/10/2016
This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com			


Top View

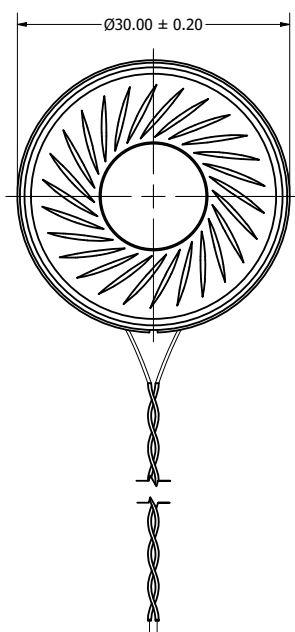

Side View

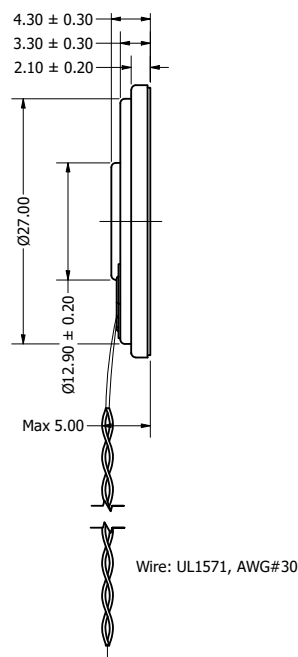

Bottom View

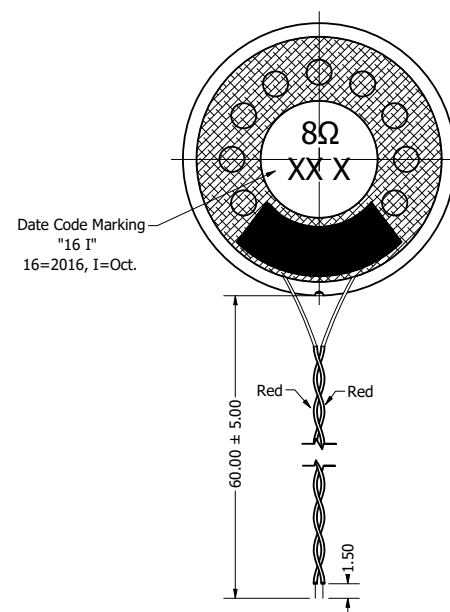

Items	Specifications	Conditions				
Sound Pressure Level	98	dB (@ 10cm)				
Resonant Frequency	470	Hz				
Frequency Range	470 ~ 6,000	Hz				
Nominal Power	0.5	W				
Max. Power	1	W	1	Updated to new template	8/10/2016	J.S.
Impedance	8	Ω	2	Updated bottom view	1/8/2020	J.S.
Cone Material	Mylar					
Mount Type	Flush Mount					
Storage Temperature	-30 ~ +60	°C				
Operating Temperature	-30 ~ +60	°C				
Weight	6.5	g				

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
	Released from Engineering	10/21/2013	J.S.
1	Updated to new template	8/10/2016	J.S.
2	Updated bottom view	1/8/2020	J.S.

NOTES

- 1) All dimensions are in mm unless otherwise noted
- 2) All tolerances are ± 0.5 mm unless otherwise noted
- 3) All parts meet RoHS
- 4) Subject to change or redrawn without notice